


4 - 1 頻度計測 (HR-908A)



ゲージ貼り付け



ゲージのコーティング


4芯シールド線



ブリッジヘッドへ接続



ブリッジヘッド



頻度

GP-IB カード



頻度計本体 (908A)

最大 8 点

ブリッジヘッド
の線

12V 電源供給



計測設定 (パソコン)
(計測開始)

パソコンを使用した計測例（頻度解析ソフト HR-7610）

1測点をレインフロー・PEAK / V
二種類の解析をおこなう。

スライス数の設定

測定点の名前
1台に最大8点


無効振幅

画面設定はアンプ設定および解析条件設定です

モニター (パソコン画面)



3日間データ収録後の頻度解析 パソコン画面

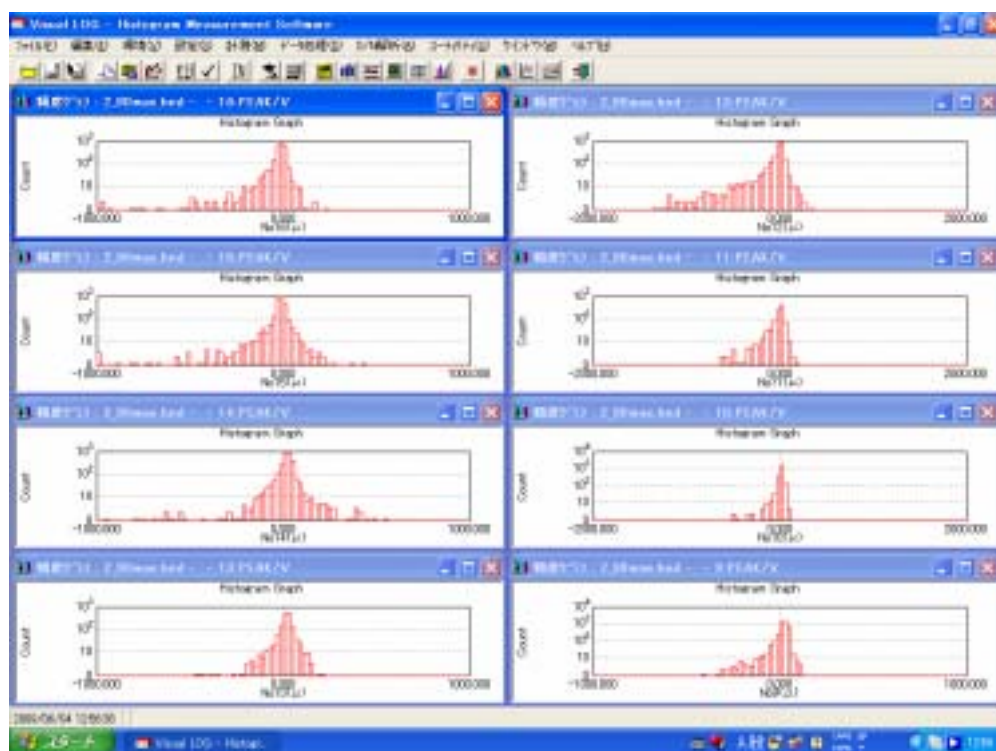

データ整理一覧（レインフロー：ピークバレー）

No.	(μ)	Mpa	Count	Count(s)
50	1000	197	0	0.00
49	980	193	0	0.00
48	960	189	0	0.00
47	940	185	0	0.00
46	920	181	0	0.00
45	900	177	0	0.00
44	880	173	0	0.00
43	860	169	0	0.00
42	840	165	0	0.00
41	820	162	0	0.00
40	800	158	0	0.00
39	780	154	0	0.00
38	760	150	0	0.00
37	740	146	0	0.00
36	720	142	0	0.00
35	700	138	0	0.00
34	680	134	0	0.00
33	660	130	0	0.00
32	640	126	0	0.00
31	620	122	0	0.00
30	600	118	0	0.00
29	580	114	0	0.00
28	560	110	0	0.00
27	540	106	0	0.00
26	520	102	0	0.00
25	500	98	0	0.00
24	480	94	0	0.00
23	460	91	0	0.00
22	440	87	0	0.00
21	420	83	0	0.00
20	400	79	0	0.00
19	380	75	0	0.00
18	360	71	0	0.00
17	340	67	0	0.00
16	320	63	0	0.00
15	300	59	0	0.00
14	280	55	0	0.00
13	260	51	0	0.00
12	240	47	0	0.00
11	220	43	0	0.00
10	200	39	0	0.00
9	180	35	0	0.00
8	160	32	0	0.00
7	140	28	0	0.00
6	120	24	0	0.00
5	100	20	0	0.00
4	80	16	0	0.00
3	60	12	2	0.03
2	40	8	1121	15.19
1	20	4	2895	39.22
-1	-20	-4	2776	37.61
-2	-40	-8	577	7.82
-3	-60	-12	10	0.14
-4	-80	-16	0	0.00
-5	-100	-20	0	0.00
-6	-120	-24	0	0.00
-7	-140	-28	0	0.00
-8	-160	-32	0	0.00
-9	-180	-36	0	0.00
-10	-200	-39	0	0.00
-11	-220	-43	0	0.00
-12	-240	-47	0	0.00
-13	-260	-51	0	0.00
-14	-280	-55	0	0.00
-15	-300	-59	0	0.00
-16	-320	-63	0	0.00
-17	-340	-67	0	0.00
-18	-360	-71	0	0.00
-19	-380	-75	0	0.00
-20	-400	-79	0	0.00
-21	-420	-83	0	0.00
-22	-440	-87	0	0.00
-23	-460	-91	0	0.00
-24	-480	-95	0	0.00
-25	-500	-99	0	0.00
-26	-520	-102	0	0.00
-27	-540	-106	0	0.00
-28	-560	-110	0	0.00
-29	-580	-114	0	0.00
-30	-600	-118	0	0.00
-31	-620	-122	0	0.00
-32	-640	-126	0	0.00
-33	-660	-130	0	0.00
-34	-680	-134	0	0.00
-35	-700	-138	0	0.00
-36	-720	-142	0	0.00
-37	-740	-146	0	0.00
-38	-760	-150	0	0.00
-39	-780	-154	0	0.00
-40	-800	-158	0	0.00
-41	-820	-162	0	0.00
-42	-840	-166	0	0.00
-43	-860	-169	0	0.00
-44	-880	-173	0	0.00
-45	-900	-177	0	0.00
-46	-920	-181	0	0.00
-47	-940	-185	0	0.00
-48	-960	-189	0	0.00
-49	-980	-193	0	0.00
-50	-1000	-197	0	0.00
24	480	94	0	0.00
23	460	91	2	0.02
22	440	87	2	0.02
21	420	83	4	0.04
20	400	79	2	0.02
19	380	75	4	0.04
18	360	71	6	0.06
17	340	67	7	0.07
16	320	63	5	0.05
15	300	59	12	0.12
14	280	55	18	0.19
13	260	51	24	0.24
12	240	47	14	0.14
11	220	43	28	0.28
10	200	39	26	0.26
9	180	35	56	0.56
8	160	32	42	0.42
7	140	28	65	0.65
6	120	24	95	0.95
5	100	20	120	1.20
4	80	16	240	2.40
3	60	12	882	8.82
2	40	8	8406	83.83
1	20	4	0	0.00

